

POLU-AUTOMATSKA MAŠINA ZA HORIZONTALNO - ORBITALNO PAKOVANJE STREČ FOLIJOM

Wrappy^s



www.masinezapakovanje.com



Wrappy s4, s6, s9, s12



- Nož za odsecanje




- Ulazna traka podesiva po visini



- Ekran na dodir u boji

Dimenzije Wrappy s4, s6, s9, s12

Radne dimenzije

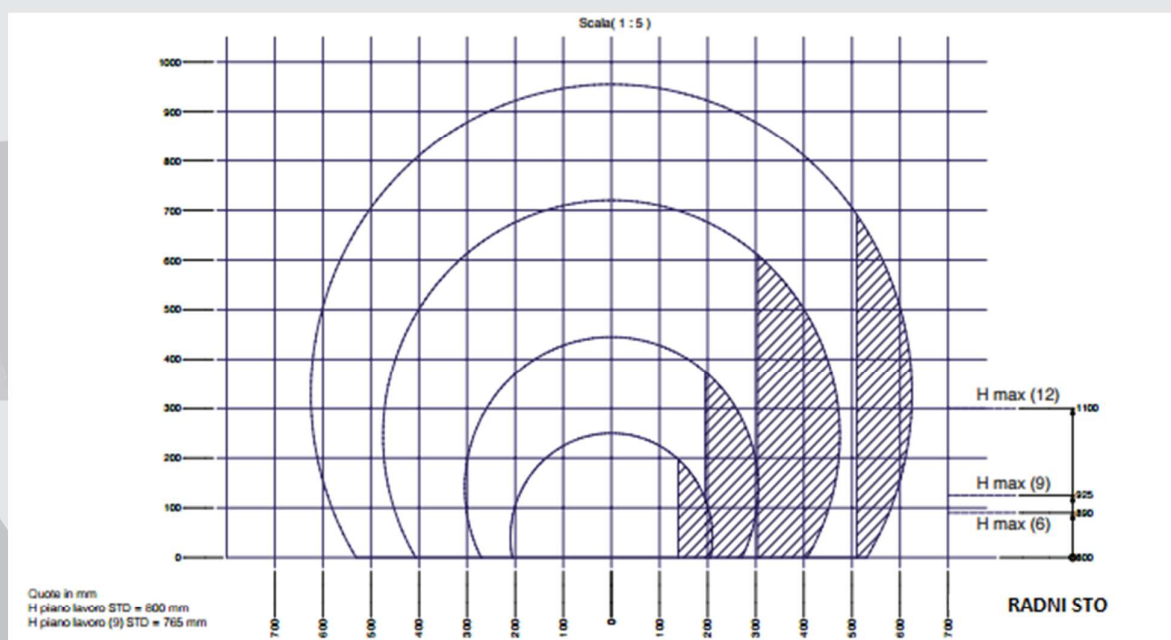


H min. Radni sto (standard 800mm)

H max. Visina radnog stola: (Wrappy S4: 800mm - Wrappy S6: 920mm - Wrappy S9: 950mm - Wrappy S12: 1100mm)

Minimalna dimenzija radnog stola: Wrappy S4: 50x50mm - Wrappy S6: 70x70 mm - Wrappy S9: 90x90mm - Wrappy S12: 150x150mm

DIMENZIJE MAŠINE						
MAŠINA	s4	s6	s9		s12	
Širina folije mm	125	125	50÷125	50÷125	50÷125	50÷125
L mm	1355	1355	1375	1500	2070	2070
W mm	220	305	500	500	815	815
H mm	1350	1755	2180	2180	2700	2700
H' mm	800 (fissa)	800÷920	800÷950	800÷950	800÷1100	800÷1100

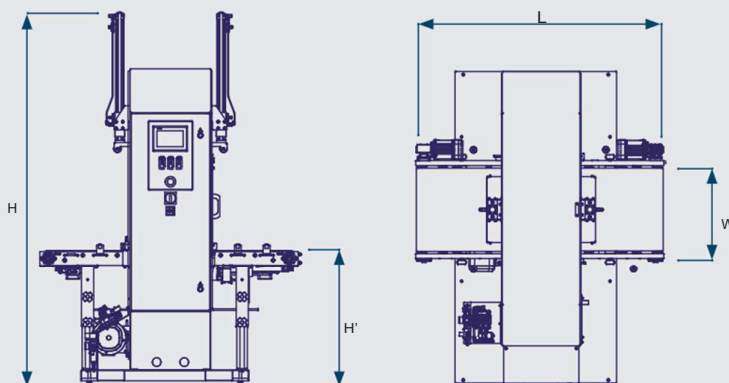

TEHNIČKE KARAKTERISTIKE

MAŠINA	s4	s6	s9		s12
Širina folije	125	125	125	250	125-250
Pogonski prenos preko kaiša	x	x	x	x	x
Maksimalni broj rotacije	160 rpm	120 rpm	75 rpm	60rpm	58rpm
Automatski ciklus omotavanja	x	x	x	x	x
Motorizovana ulazna i izlazna traka	600	600	600	600	850
Brzina kontrolisanja preko invertera (m/min.)	8÷17	6÷13	2÷8	4÷14	5÷13
Kontrola početka i kraja ciklusa pakovanja preko fotočelije	x	x	x	x	x
Pneumatska presa na ulazu i izlazu	x	x	x	x	x
Mehaničko zatezanje folije	x	X	X	X	X
Napajanje	400V 3Ph+N 50/60 Hz	400V 3Ph+N 50/60 Hz	400V 3Ph+N 50/60 Hz	400V 3Ph+N 50/60 Hz	400V 3Ph+N 50/60 Hz
Instalirana snaga	0,9kW	1,1 kW	1,1 kW	1,1 kW	2 kW
Radni pritisak	6±1bar	6±1bar	6±1bar	6±1bar	6±1bar
Potrošnja vazduha (NI/cycle)	3,5	5	9,4	10,8	14,3

TEHNIČKE KARAKTERISTIKE FOLIJE

Spoljašnji prečnik rolne (mm)	200	200	200	250	250
Prečnik hilzne (mm)	76	76	76	76	76



Gausi doo
Gundulićev venac 37,
11000 Beograd (Srbija)

Tel. +381 11 3392 706
fax +381 11 3392 731
info@gausi.com

www.masinezapakovanje.com