

Audion STEAMSEALER



■ Specifications

* Standard model

| Product name | EPV-610 | EPV-610NTW |
|-----------------------|---|---|
| Seal length (mm) | 610 (24") | 610 (24") |
| Seal width (mm) | 8 (5/16") | 8 (5/16") |
| Heating method | Single lower side | Single lower side |
| Heating temperature | 120 - 160°C (248F) | 120 - 160°C (248F) |
| Supply vapor pressure | 0.8MPa | 0.8MPa |
| Steam flow | 10kg/h | 10kg/h |
| Air source | External air piping Compatible compressor: 75L/min 0.55MPa | External air piping Compatible compressor: 75L/min 0.55MPa |
| Machine dimensions | 780 (30.7") × 465 (18.3") × 300 (11.8") | 780 (29.5") × 475 (18.7") × 300 (11.8") |

Radite bez struje


- Da bi varilica radila nije potrebna struja, rade sa zasićenom parom i komprimovanim vazduhom.
- Omogućava upotrebu vara u opasnom području.
- Zasićena para i komprimovani vazduh treba unapred pripremiti u radnoj prostoriji,

Dostupan u zapaljivoj atmosferi klasne temperature paljenja G2

- Dudače da parni var koristi samo zasićenu paru, temperatura površine nikada ne prelazi 175 stepeni.

Dostupan u opasnom području

- Varilica se može koristiti u zoni (Class I, Division I) ili zoni 2 (Class I, Division I).

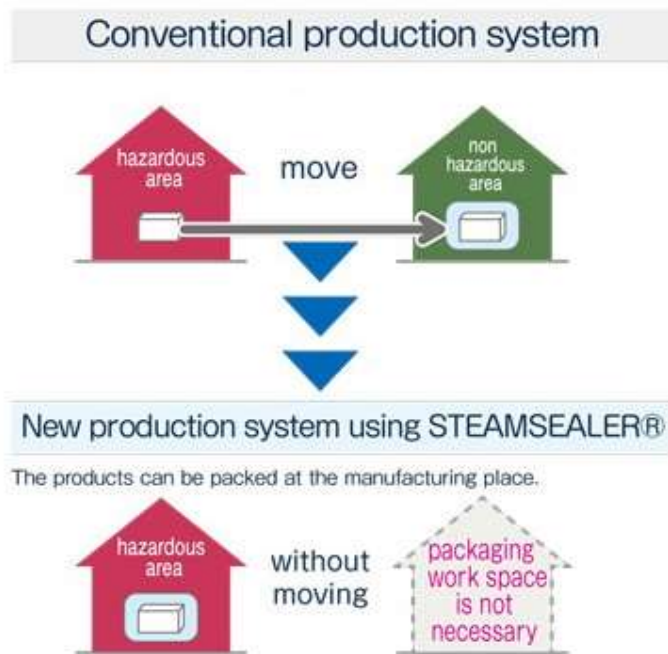

NTW model – Vakum varilica

- EPW-610 NTV model može ukloniti vazduh u vrećici kroz usisavanje mlaznica pre zatvaranja.
- Ovoj vakumskoj varilici je potreban samo komprimovani vazduh, vakuum pumpa nije potrebna.