



Pokretne trake GHS Series

- ✓ Transportna traka koji se mogu povezati sa automatskim kontinuiranim sistemima za pakovanje
- ✓ Podešavanje brzine trake se upravlja direktno iz kontrolne table mašine koja je povezana sa trakom, optimizujući njihove performanse
- ✓ Motorizovana traka
- ✓ Traka sa servomotorima
- ✓ Priključna traka izmedju tunela i sistema za pakovanje
- ✓ Idealne za proizvode duže od 1000mm - **GHS2000/400R-700R**
- ✓ Motorizovan lanac sa slobodno-kotrljajućim valjcima - **GHS2000/400R-700R**

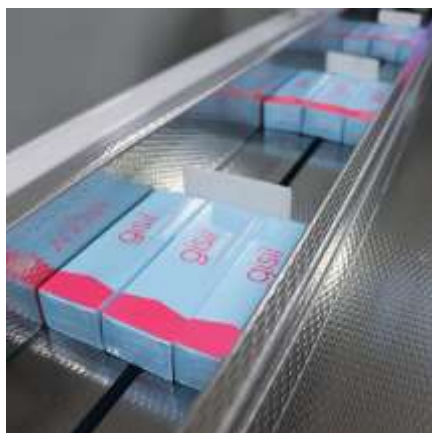

GHS2000/400B

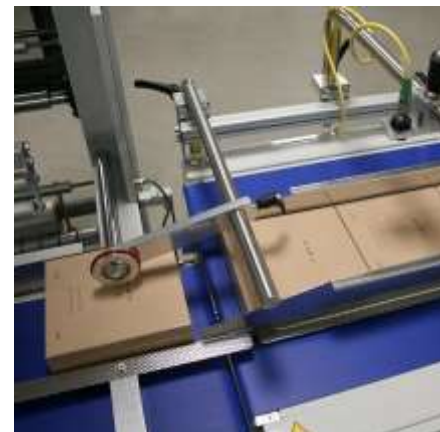

Tehničke karakteristike – GHS2000/400B

Napajanje 220 - 240 V, 1PH - N - PE, 50/60 Hz

Instalirana snaga 370 W

Brzina trake 6 - 28 m/min

Dimenzije trake 2080 x 1010 mm, h 875 - 1035 mm

GHS2000/700B



Tehničke karakteristike – GHS2000/700B

220 - 240 V, 1PH - N - PE, 50/60

Napajanje Hz

Instalirana snaga 370 W

Brzina trake 6 - 28 m/min

2080 - 1510 mm h 875 - 1035

Tehničke karakteristike – GHS2000/400F

220 - 240 V, 1PH - N - PE, 50/60

Napajanje Hz

Instalirana snaga 180W

Brzina trake 13 - 60 m/min

Dimenzije trake 2060 - 1010 mm, h 875 - 1035 mm

Tehničke karakteristike – GHS2000/400F

220 - 240 V, 1PH - N - PE, 50/60

Napajanje Hz

Instalirana snaga 180W

Brzina trake 7,5 - 36 m/min

Dimenzije trake 2060 - 1010 mm, h 875 - 1035 mm

GHS2000/400P



GHS2000/400S



Tehničke karakteristike – GHS2000/400S

Napajanje 220 - 240 V, 1PH - N - PE,
50/60 Hz

Instalirana snaga 1500 W

Brzina trake 5 - 35 m/min

Dimenzije trake 2080 x 1010 mm, h 875 -
1035mm

Tehničke karakteristike – GHS2000/400R

Napajanje 220 - 240 V, 1PH - N - PE,
50/60 Hz

Instalirana snaga 370 W

Brzina trake 7.5 - 36 m/min

Dimenzije trake 2065 - 630 mm, h 790 - 950
mm

GHS2000/400R



GHS2000/700R



Tehničke karakteristike – GHS2000/700R

Napajanje 220 - 240 V, 1PH - N - PE,
50/60 Hz

Instalirana snaga 370 W

Brzina trake 7,5 - 36 m/min

Dimenzije trake 2065 - 930 mm, h 790 - 950
mm